

## FLANGE CIECHE FORGIATE

ASME B 16.5  
 ASTM A182  
 ASTM A105  
 ASTM A403  
 150 / 300 / 600 LBS




### FORGED BLIND FLANGES

ASME B 16.5  
 ASTM A182  
 ASTM A105  
 ASTM A403  
 150 / 300 / 600 LBS

STAINLESS STEEL AND CARBON STEEL

300 LBS

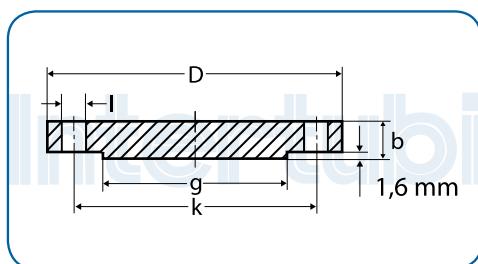

150 LBS

Nom. Size	O.D. mm	D mm	b mm	g mm	l mm	k mm	Fori Holes	kg
1/2"	21.3	90	11.2	35.1	15.7	60.3	4	0.42
3/4"	26.7	100	12.7	42.9	15.7	69.9	4	0.61
1"	33.4	110	14.3	50.8	15.7	79.4	4	0.86
1 1/4"	42.2	115	15.9	63.5	15.7	88.9	4	1.30
1 1/2"	48.3	125	17.5	73.2	15.7	98.4	4	1.53
2"	60.3	150	19.1	91.9	19.1	120.7	4	2.42
2 1/2"	73.0	180	22.3	104.8	19.1	139.7	4	4.10
3"	88.9	190	23.9	127.0	19.1	152.4	8	4.93
4"	114.3	230	23.9	157.2	19.1	190.5	8	7.00
5"	141.3	255	23.9	185.7	22.4	215.9	8	9.00
6"	168.3	280	25.4	215.9	22.4	241.3	8	11.30
8"	219.1	345	28.6	269.7	22.4	298.5	8	19.69
10"	273.0	405	30.2	323.9	25.4	362.0	12	28.80
12"	323.8	485	31.8	381.0	25.4	431.8	12	43.20
14"	355.6	535	35.0	412.7	25.4	476.2	12	59.00
16"	406.4	595	36.6	469.9	28.4	539.8	16	79.00
18"	457.2	635	39.7	533.4	31.8	577.9	16	93.70
20"	508.0	700	42.9	584.2	31.8	635.0	20	122.00
24"	609.6	815	47.7	692.2	35.1	749.3	20	185.00

Nom. Size	O.D. mm	D mm	b mm	g mm	l mm	k mm	Fori Holes	kg
1/2"	21.3	95	14.3	35.0	15.7	66.7	4	0.64
3/4"	26.7	115	15.9	42.9	19.0	82.6	4	1.11
1"	33.4	125	17.5	50.8	19.0	88.9	4	1.39
1 1/4"	42.2	135	19.1	63.5	19.0	98.4	4	2.00
1 1/2"	48.3	155	20.7	73.1	22.3	114.3	4	2.66
2"	60.3	165	22.3	91.9	19.0	127.0	8	3.18
2 1/2"	73.0	190	25.4	104.8	22.3	149.2	8	5.10
3"	88.9	210	28.6	127.0	22.3	168.3	8	6.81
4"	114.3	255	31.8	157.2	22.3	200.0	8	11.50
5"	141.3	280	35.0	185.7	22.3	235.0	8	14.50
6"	168.3	320	36.6	215.9	22.3	269.9	12	20.90
8"	219.1	380	41.3	269.7	25.4	330.2	12	34.30
10"	273.0	445	47.7	323.8	28.6	387.4	16	57.00
12"	323.8	520	50.8	381.0	31.7	450.8	16	87.00

600 LBS

Nom. Size	D mm	b mm	g mm	l mm	k mm	Fori Holes	kg
1/2"	95	14.3	35	15.7	66.7	4	0.70
3/4"	115	15.9	42.9	19.0	82.6	4	1.20
1"	125	17.5	50.8	19.0	88.9	4	1.50
1 1/4"	135	20.7	63.5	19.0	98.4	4	2.00
1 1/2"	155	22.3	73.1	22.3	114.3	4	3.20
2"	165	25.4	91.9	19.0	127.0	8	4.30
2 1/2"	190	28.6	104.8	22.2	149.2	8	6.00
3"	210	31.7	127.0	22.2	168.3	8	8.00
4"	275	38.1	157.2	25.4	215.9	8	18.0
5"	330	44.4	185.7	28.6	266.7	8	28.5
6"	355	47.6	215.9	28.6	292.1	12	35.5
8"	420	55.6	269.7	31.7	349.2	12	58.0
10"	510	63.5	323.8	34.9	431.8	16	98.0
12"	560	66.7	381.0	34.9	488.9	20	125